




AWWA C207-13 Class B RING and BLIND FLANGES

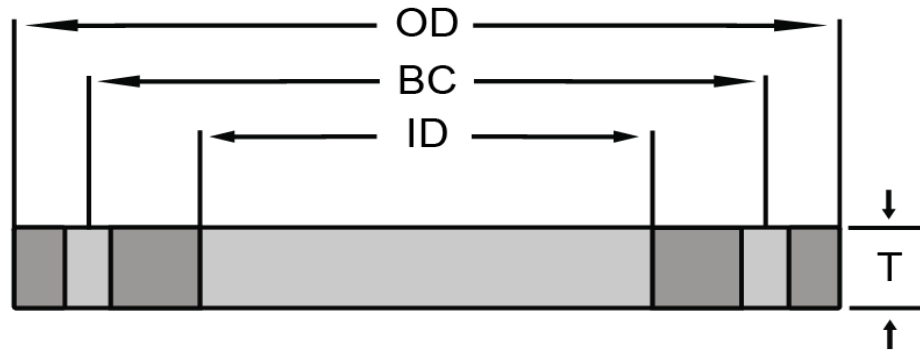

Nominal size	Outside Diameter (OD)	Slip-on Bore (ID)	No. of Bolt Holes	Diameter Of Holes	Bolt Circle (BC)	Thickness (T)		Weight Each (lbs)	
						Slip-on	Blind	Slip-on	Blind
4	9.00	4.57	8	0.750	7.50	0.625	0.625	7.7	10.6
5	10.00	5.66	8	0.875	8.50	0.625	0.625	8.6	13.1
6	11.00	6.72	8	0.875	9.50	0.688	0.688	10.7	17.6
8	13.50	8.72	8	0.875	11.75	0.688	0.688	15.3	27.0
10	16.00	10.88	12	1.000	14.25	0.688	0.688	19.2	37.4
12	19.00	12.88	12	1.000	17.00	0.688	0.719	28.1	55.8
14	21.00	14.19	12	1.125	18.75	0.688	0.791	34.4	75.0
16	23.50	16.19	16	1.125	21.25	0.688	0.892	41.3	105.6
18	25.00	18.19	16	1.250	22.75	0.688	0.950	41.2	126.8
20	27.50	20.19	20	1.250	25.00	0.688	1.040	48.6	167.8
22	29.50	22.19	20	1.375	27.25	0.750	1.132	56.8	209.7
24	32.00	24.19	20	1.375	29.50	0.750	1.216	67.0	266.9
26	34.25	26.19	24	1.375	31.75	0.812	1.307	79.3	328.0
28	36.50	28.19	28	1.375	34.00	0.875	1.398	93.7	398.0
30	38.75	30.19	28	1.375	36.00	0.875	1.477	103.9	476.1
32	41.75	32.19	28	1.625	38.50	0.938	1.581	131.3	587.2
34	43.75	34.19	32	1.625	40.50	0.938	1.661	137.0	676.2
36	46.00	36.19	32	1.625	42.75	1.000	1.751	159.7	791.6
38	48.75	38.19	32	1.625	45.25	1.000	1.853	184.5	945.1
40	50.75	40.19	36	1.625	47.25	1.000	1.933	191.5	1067.0
42	53.00	42.19	36	1.625	49.50	1.125	2.023	232.5	1221.8
44	55.25	44.19	40	1.625	51.75	1.125	2.114	247.6	1386.3
46	57.25	46.19	40	1.625	53.75	1.125	2.194	258.6	1548.6
48	59.50	48.19	44	1.625	56.00	1.250	2.285	304.9	1741.1
50	61.75	50.19	44	1.875	58.25	1.250	2.377	315.2	1935.1
52	64.00	52.19	44	1.875	60.50	1.250	2.468	336.9	2164.6
54	66.25	54.19	44	1.875	62.75	1.375	2.559	395.1	2411.3
60	73.00	60.19	52	1.875	69.25	1.500	2.820	506.1	3229.4
66	80.00	66.19	52	1.875	76.00	1.625	3.092	661.1	4277.8
72	86.50	72.19	60	1.875	82.50	1.750	3.353	798.8	5425.4
78	93.00	78.19	64	2.125	89.00	2.000	NA	995.6	-
84	99.75	84.19	64	2.125	95.50	2.000	NA	1140.7	-
90	106.50	90.19	68	2.375	102.00	2.250	NA	1408.8	-
96	113.25	96.19	68	2.440	108.50	2.250	NA	1591.2	-
102	120.00	102.19	72	2.625	114.50	2.500	NA	1918.7	-
108	126.75	108.19	72	2.625	120.75	2.500	NA	2142.6	-
114	133.50	114.19	76	2.875	126.75	2.750	NA	2534.1	-
120	140.25	120.19	76	2.875	132.75	2.750	NA	2803.9	-
126	147.00	126.19	80	3.125	139.25	3.000	NA	3263.6	-
132	153.75	132.19	80	3.125	145.75	3.000	NA	3583.5	-
144	167.25	144.19	84	3.375	158.25	3.250	NA	4489.5	-

Dimensions in inches
86 PSI Pressure Rating for water service