




AWWA C207-13 Class E RING and BLIND FLANGES

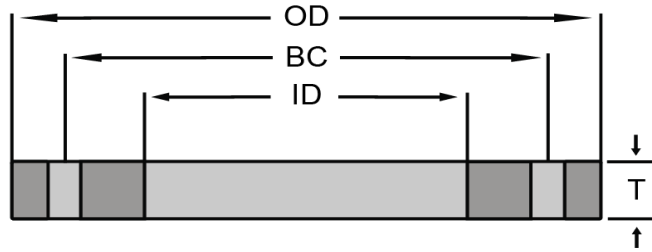

Nominal size	Outside Diameter (OD)	Slip-on Bore (ID)	No. of Bolt Holes	Diameter Of Holes	Bolt Circle (BC)	Thickness (T)		Weight Each (lbs)	
						Slip-on	Blind	Slip-on	Blind
4	9.00	4.57	8	0.750	7.50	1.125	1.125	13.9	19.2
5	10.00	5.66	8	0.875	8.50	1.188	1.188	16.3	24.8
6	11.00	6.72	8	0.875	9.50	1.313	1.313	20.4	33.6
8	13.50	8.72	8	0.875	11.75	1.500	1.500	33.4	58.8
10	16.00	10.88	12	1.000	14.25	1.563	1.563	43.7	84.9
12	19.00	12.88	12	1.000	17.00	1.750	1.750	71.4	135.9
14	21.00	14.19	12	1.125	18.75	1.875	1.875	93.7	177.7
16	23.50	16.19	16	1.125	21.25	2.000	2.000	120.2	236.8
18	25.00	18.19	16	1.250	22.75	2.125	2.125	127.3	283.7
20	27.50	20.19	20	1.250	25.00	2.375	2.375	167.8	383.2
22	29.50	22.19	20	1.375	27.25	2.500	2.500	189.2	463.1
24	32.00	24.19	20	1.375	29.50	2.625	2.625	234.3	576.1
26	34.25	26.19	24	1.375	31.75	2.750	2.750	268.4	690.1
28	36.50	28.19	28	1.375	34.00	2.750	2.750	294.5	782.9
30	38.75	30.19	28	1.375	36.00	2.875	2.875	341.4	926.8
32	41.75	32.19	28	1.625	38.50	3.000	3.000	420.0	1114.3
34	43.75	34.19	32	1.625	40.50	3.000	3.050	438.3	1241.8
36	46.00	36.19	32	1.625	42.75	3.125	3.209	498.9	1450.7
38	48.75	38.19	32	1.625	45.25	3.125	3.394	576.5	1731.1
40	50.75	40.19	36	1.625	47.25	3.250	3.533	622.3	1950.2
42	53.00	42.19	36	1.625	49.50	3.375	3.695	697.6	2231.5
44	55.25	44.19	40	1.625	51.75	3.375	3.857	742.7	2529.4
46	57.25	46.19	40	1.625	53.75	3.438	3.997	790.2	2821.3
48	59.50	48.19	44	1.625	56.00	3.500	4.159	853.6	3169.0
50	61.75	50.19	44	1.875	58.25	3.500	4.327	882.7	3522.6
52	64.00	52.19	44	1.875	60.50	3.625	4.489	977.1	3937.1
54	66.25	54.19	44	1.875	62.75	3.750	4.651	1077.6	4382.5
60	73.00	60.19	52	1.875	69.25	3.875	5.116	1307.4	5858.7
66	80.00	66.19	52	1.875	76.00	4.250	5.601	1729.0	7749.0
72	86.50	72.19	60	1.875	82.50	4.375	6.066	1997.0	9815.3
78	93.00	78.19	64	2.125	89.00	4.750	NA	2364.5	-
84	99.75	84.19	64	2.125	95.50	4.750	NA	2709.1	-
90	106.50	90.19	68	2.375	102.00	5.125	NA	3208.8	-
96	113.25	96.19	68	2.440	108.50	5.125	NA	3624.3	-
102	120.00	102.19	72	2.625	114.50	5.500	NA	4221.1	-
108	126.75	108.19	72	2.625	120.75	5.500	NA	4713.8	-
114	133.50	114.19	76	2.875	126.75	5.875	NA	5413.8	-
120	140.25	120.19	76	2.875	132.75	5.875	NA	5990.1	-
126	147.00	126.19	80	3.125	139.25	6.250	NA	6799.2	-
132	153.75	132.19	80	3.125	145.75	6.250	NA	8062.8	-

Dimensions in inches
275 PSI Pressure Rating for water service